

K-35 A • B • C • D

CERAMIC MIXING CARTRIDGES
CONVENTIONAL SINGLE-LEVER TYPE
35 MM SIZES



MADE in the EUROPEAN UNION

TECHNICAL CHARACTERISTICS OF THE CERAMIC DISCS:

Material: Al_2O_3
Surface roughness Ra: 0.2 μm
Contact surface area: 50-80%


TECHNICAL CHARACTERISTICS OF THE CARTRIDGE:

Opening angle:	25°
Mixing angle:	90°
Max. temperature:	90°C / 194°F
Recommended tightening torque:	12-13 Nm / 106-115 lbf•in
Pressure test:	
pneumatic	6 bar / 87 psi
hydraulic	35 bar / 500 psi
Flow rate	(3 bar / 45 psi, test faucet, EN 817): 26.0 l/min / 6.8 gpm without resistance 20.1 l/min / 5.3 gpm with resistance „C”
Endurance test:	EN 817 70 000 cycles ASME A112.18.1 500 000 cycles


K-35 A • B • C • D

CERAMIC MIXING CARTRIDGES
CONVENTIONAL SINGLE-LEVER TYPE
35 MM SIZES

CARTRIDGES

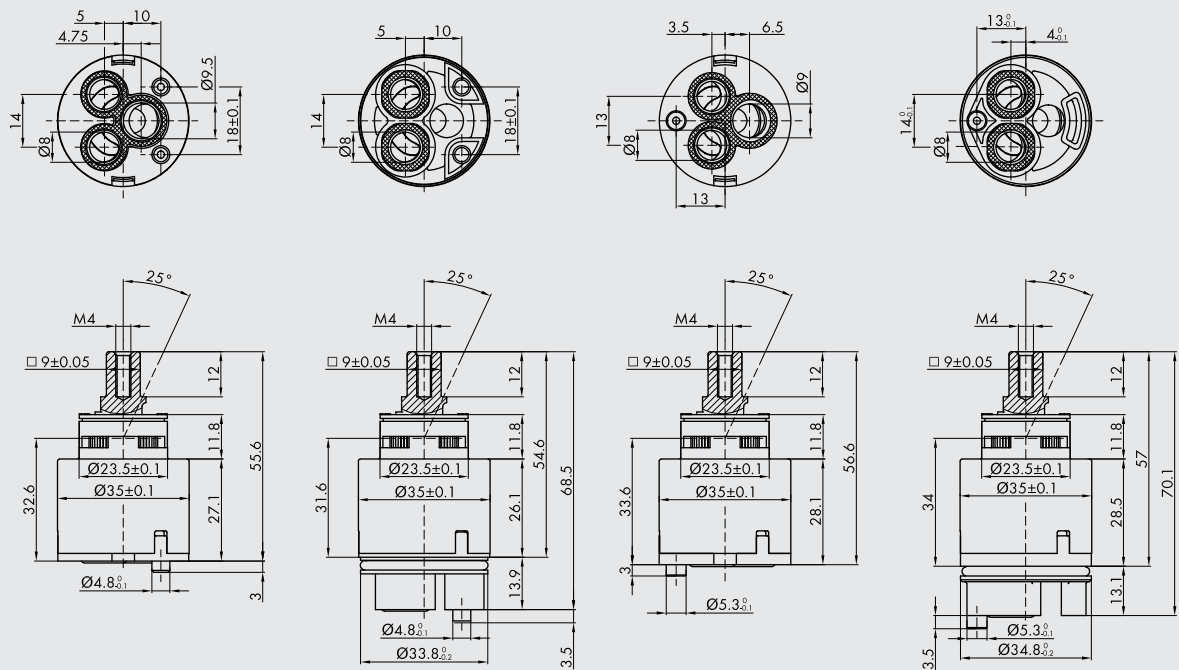

BODIES

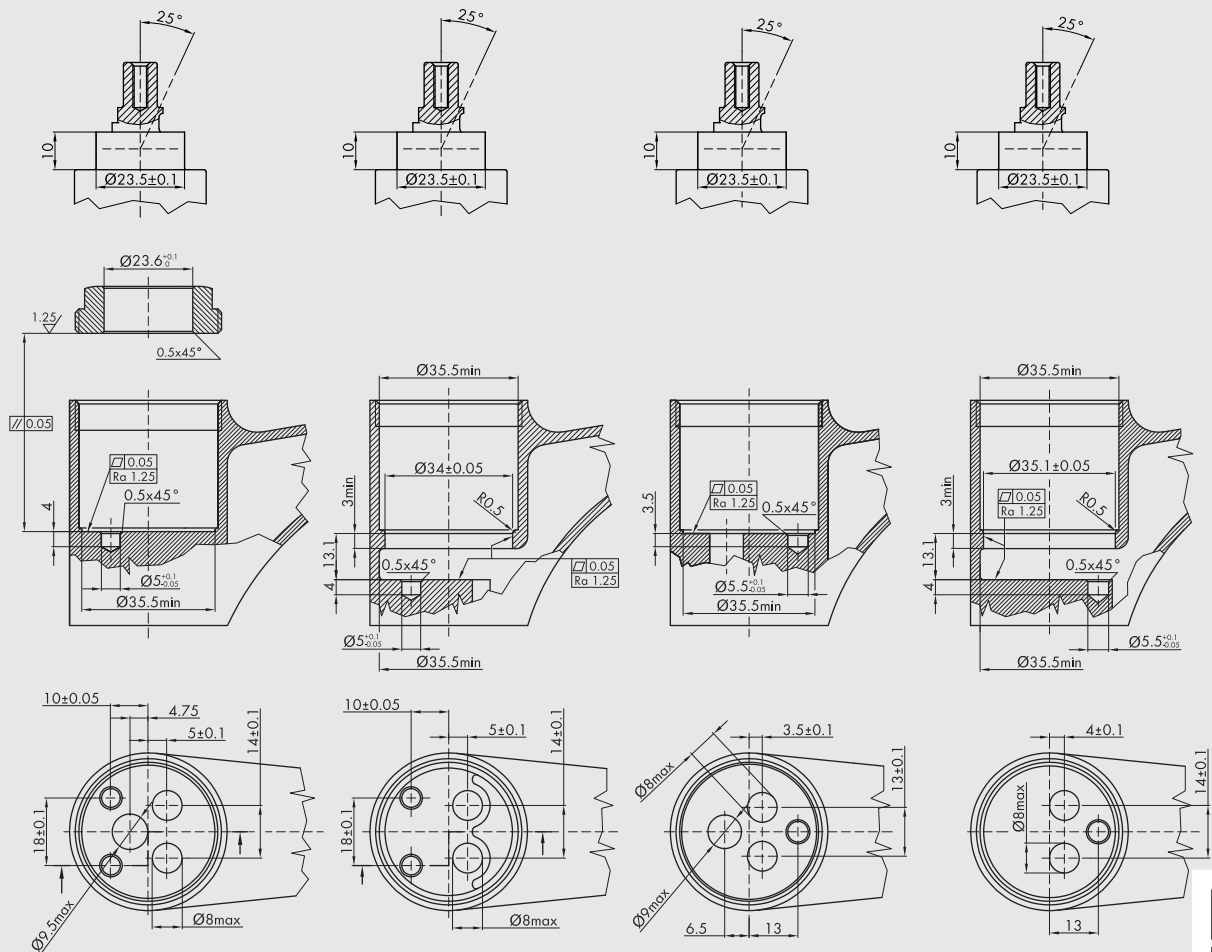

K-35 A

K-35 B


K-35 C

K-35 D




YOUR PARTNER IN WATER CONTROL | www.kerox.net

FLOW RATE CURVE

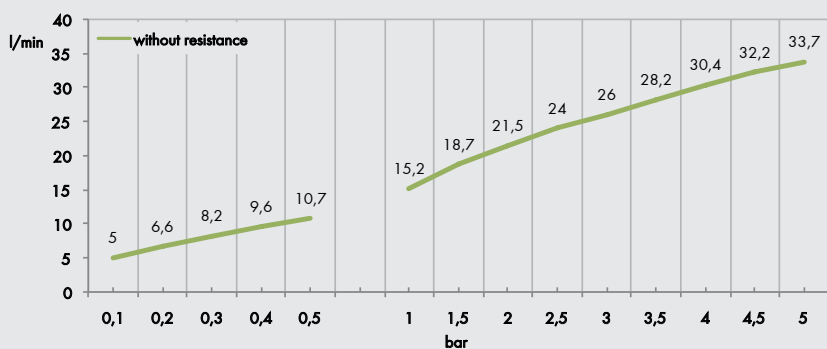

FLOW RATE & HYSTERESIS CURVES

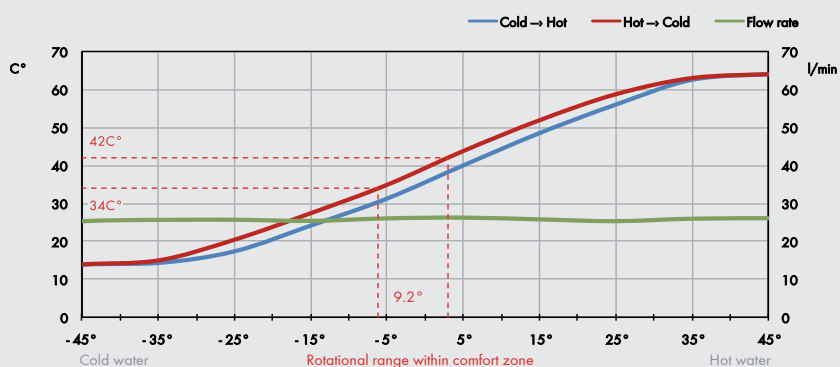

General requirements for nut and faucet:

1. Made of solid metal material instead of plastic
2. Usage of any lubricant on threads is not allowed
3. No sharp or burry sections at sealing surfaces
4. Recommended tightening torque is relevant to brass-brass connection with 1.5 mm thread pitch.

